


Pi LV1



Features

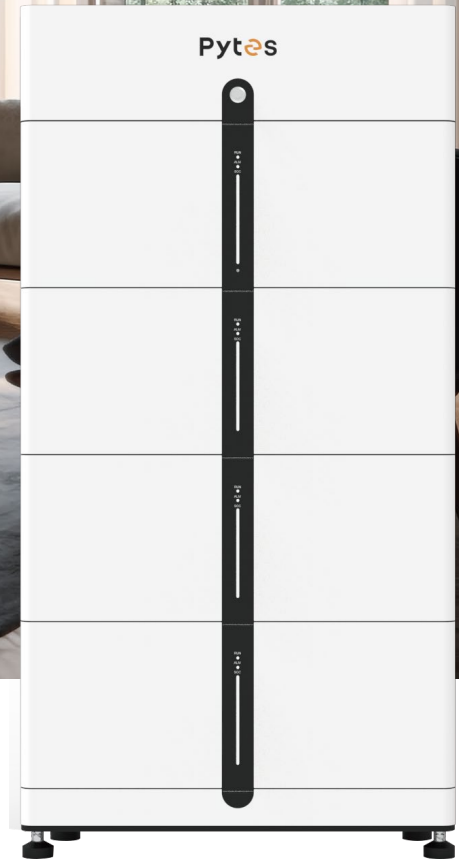

Safe

- LFP Chemistry, Field-Proven BMS Integrated in Individual Module, DC Breaker & Fuse Adapted



Powerful

- Up to 14.08kW Continuous Output



Plug-and-play (15-min installation)

- Quick Connectors, Hand-wiring Free



Scalable on Demand

- Flexible Configuration from 10.24 to 30.72 kWh per Stack, Up to 4 Stacks



Outdoor Rated Enclosure

- Water & Dust proof for Both Indoor and Outdoor




Smart

- Remote Upgrading & Monitoring

Pi LV1

Battery Module Unit:

Cell Type	LFP
Nominal Energy	5.12kWh
Nominal Voltage	51.2V
Voltage Range	47.5V~56.8V
Nominal Capacity	100Ah
Recommended Continuous Discharge Current	50A
Recommended Continuous Charge Current	50A
Certifications	CE, IEC62619, UL1973, UN38.3, UL9540, UL9540A

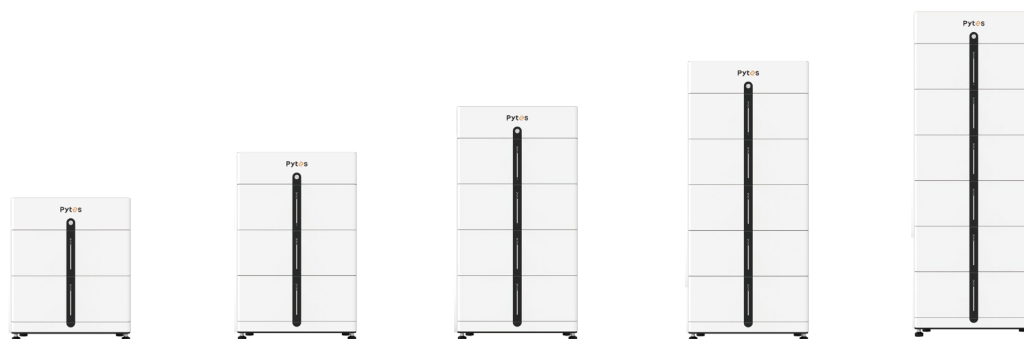

Model	2	3	4	5	6
Cell Type	LFP				
Nominal Voltage	51.2V				
Voltage Range	47.5V~56.8V				
Nominal Capacity	100Ah				
Nominal Energy	10.24kWh	15.36 kWh	20.48 kWh	25.6 kWh	30.72 kWh
Recommended Power	5.12kW	7.68kW	10.24kW	10.24kW	10.24kW
Dimensions (L*W*H) (mm/inch)	681*242*800 26.8*9.5*31.5	681*242*1060 26.8*9.5*41.7	681*242*1320 26.8*9.5*52.0	681*242*1580 26.8*9.5*62.2	681*242*1840 26.8*9.5*72.4
Weight(kg/lbs)	130/285.5	187/411.2	244/536.8	301/662.5	358/788.2
Communication	CAN, RS485				
Cycle Life	≥ 6000 cycles				
Protection level	IP55				
Ambient Temperature	-10°C~55°C / 14°F~131°				
Storage Temperature	Within 1 month: -20°C~50°C / -4°F~122°F 1~3 months: -10°C~40°C / 14°F~104°F 3~12 months: 0°C~30°C / 32°F~86°F				

* The maximum power and peak power are tested based on an ambient temperature of 25 °C.